



- Imager CMOS Sensor
- Format 1/3"
- Array Size NTSC - 510 x 492
- Resolution 310 TV Lines
- Scanning 2:1 Interlace
- Auto Shutter 1/60 to 1/15,000 sec.
- Minimum Illumination (f1.9 - 15 Lux)
- Operating Temperature -10°C to 55°C / 14°F to 131°F
- Humidity Limits 0 - 95% Humidity
- Rated for outdoor use
- 38 Degree Range of View

INDOOR/OUTDOOR COLOR CAMERA WITH AUDIO

Color Video Camera Kit from X10 PRO, model XSC17. Featuring a **built-in microphone**, this super-small, outdoor/indoor video camera uses the X10 Video SENDER (sold separately) to send **super-sharp color video and sound** up to 100 feet away. An attached 60 foot cord allows outside mounting — **simply run the cord through the wall to your Video Sender or to a audio/video source of your choice!** Capture it all on any TV, VCR, or computer video input! **Plus, the Camera can be hard wired up to one thousand feet away.**





Hard wired extension:

Note: you can extend the wire from the camera using 24 AWG twisted pair copper Cat 3 wire (up to 1000 feet), with minimal signal loss. Attach a 6 conductor telephone receptacle to the each end of the wire. It is important that you reverse the connections on one of the modular telephone receptacles as show below. i.e. pin 1 goes to pin 6, pin 2 goes to pin 5, and so on.

Modular telephone receptacle 1

Modular telephone receptacle 2

Twisted pair Cat 3 cable, up to 1000 feet.

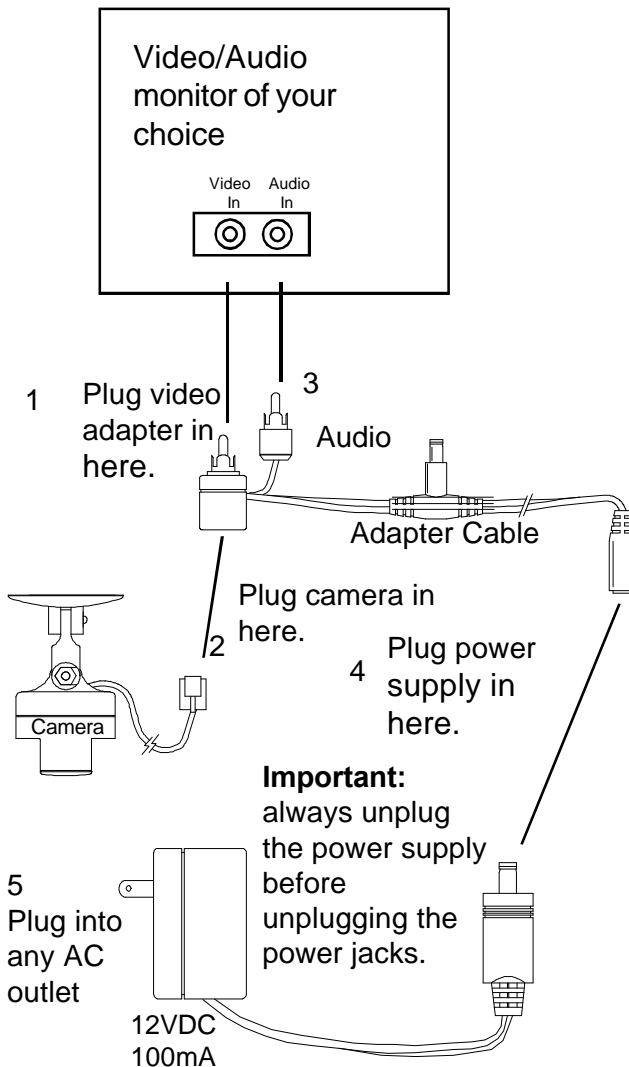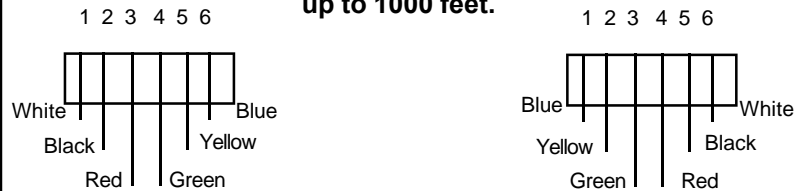

Wireless Extension:

When used with the Video Senders, (model RVK35 shown below) Transmits live video images — **COLOR** and sound — directly from the Video SENDER to the 2.4 GHz Video RECEIVER.



View live **COLOR** video on any TV or monitor you desire — up to 100 feet away — instantly and all wireless!! Powered by the Video Sender power supply!

For more information call or visit our Website
 Phone (813) 265-2888 * Toll Free (800) 411-2888 * Fax (813) 265-1011 * Email: x10pro@aol.com
 Tech Support (800) 832-4003 * Website: <http://www.x10pro.com>
 24HR. FAXBACK SERVICE (813) 265-1420

